

4MP Fixed Dome Network Camera

IPC3614LR3-PF28 (40)



Key Features

Optics

- Day/night functionality
- SmartIR, up to 30 m (98 ft) IR distance
- 2D/3D DNR (Digital Noise Reduction)

Compression

- Ultra 265, H.265, H.264, MJPEG
- Triple streams
- 9:16 corridor format

Network

- ONVIF Conformance


Structure

- Wide temperature range: -20°C to 50°C (-4°F to 122°F)
- Wide voltage range of $\pm 25\%$

Specifications

| | IPC3614LR3-PF28 | IPC3614LR3-PF40 |
|-------------------------|--|-----------------|
| Camera | | |
| Sensor | 1/3", progressive scan, 4megapixel, CMOS | |
| Lens | 2.8mm@F1.8 | 3.6mm@F1.8 |
| Angle of view(H) | 101.8° | 73.7° |
| Shutter | Auto/Manual, 1/6~1/100000 s | |
| Minimum Illumination | Colour: 0.02 Lux (F1.8, AGC ON) 0 Lux with IR | |
| Day/Night | IR-cut filter with auto switch (ICR) | |
| Digital noise reduction | 2D/3D DNR | |
| S/N | >52 dB | |
| IR Range | Up to 30m (98 ft) IR range | |
| Defog | Digital Defog | |
| WDR | DWDR | |
| AWB(Auto white balance) | Auto/manual | |
| Gain Control | Auto/manual | |
| Video | | |
| Video Compression | Ultra 265,H.265, H.264, MJPEG | |
| H.264 code profile | Baseline profile, Main Profile, High Profile | |
| Frame Rate | Main Stream:4MP (2592×1520): Max. 20 fps, 4MP (2560×1440): Max. 25 fps, 3MP (2048×1520): Max. 30 fps; Sub Stream:2MP (1920×1080): Max. 30 fps; Third Stream:D1(720×576) : Max. 30fps | |
| HLC | Supported | |
| BLC | Supported | |
| 9:16 Corridor Mode | Supported | |
| OSD | Up to 8 OSDs | |
| Privacy Mask | Up to 8 areas | |
| ROI | Up to 8 areas | |
| Motion Detection | Up to 4 areas | |
| Network | | |
| Protocols | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x | |
| Compatible Integration | ONVIF(Profile S), API | |
| Interface | | |
| Network | 1 RJ45 10M/100M Base-TX Ethernet | |
| General | | |
| Power | 12 V DC±25%, PoE (IEEE802.3 af) | |
| | Power consumption: Max 5.0W | |
| Dimensions (Ø x H) | Ø118 x 96 mm (Ø4.6" x 3.8") | |
| Weight | 0.2 kg (0.44lb) | |
| Operating Conditions | -20C ~ +50°C (-4°F ~ 122°F), Humidity :10%~95% RH(non-condensing) | |

Dimensions

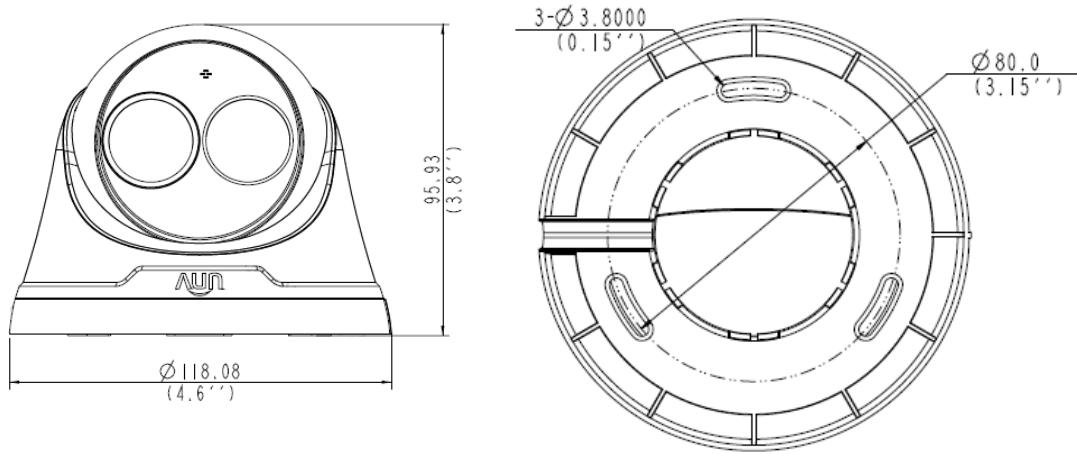

Zhejiang Uniview Technologies Co.,Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.